



PROFESSIONAL LINE ARRAY



K3

- Drivers:
 - 2x12" LF / 3" Vcoil
 - 4x5" MF / 1.5" Vcoil
 - 2x1" Exit Throat HF / 1.7" Vcoil
- Freq. Resp. 50Hz-20kHz
- Sensitivity 104dB, Max SPL 131 dB continuous
- 1400 Watts RMS
- Impedance 8 ohms
- Dispersion Horizontal coverage: 110°
Vertical coverage: Varies, depending on array length and configuration
- Crossover 500Hz, 2kHz passive
- Connectors Speakon NL8 X 2
- Dimension (W)884x(D)652x(H)356 mm

AK-3

- Amplifier Power 1200W
- XLR Input/Output
- Powercon Blue/White
- Dimension (W)1050x(D)600x(H)370 mm



VT-488

- Drivers:
 - 2x12" LF / 3" Vcoil
 - 2x1.4" exit Throat HF / 3" Vcoil
- Sensitivity 104 dB
- 1000 Watts RMS
- Freq. Resp. 40Hz-20kHz
- Maximum SPL 128dB continuous
- Impedance 8 ohms
- Dispersion Horizontal coverage 90°
Vertical coverage: Varies, depending on array length and configuration
- Crossover 600Hz 1.3kHz passive
- Connectors Speakon NL4 x 2
- Dimensions:
(W)1060mm X (D)534mm X (H)380mm

VT-488D (Active)

- Class D
- 1200 Watts Amplifier
- XLR Line Input/Output
- High Pass Filter: 30Hz - 150Hz
- Powerkon Blue/White



HLT-12X (Active)

- Dual 12" Hybrid Design
- 600 + 1200 Watts Dual Amplifier
- Low 3" Vcoil
- Hi 4 X 1.7" Vcoil
- Exit Throat 1"
- Waveguide 90 x 30 deg.
- 4 ohms
- SPL 136dB Cont. 142dB Peak
- XLR Input/Output
- Built in DSP
- Powerkon Blue/White





PROFESSIONAL LINE ARRAY



EZ-112A

- Built-in DSP control
- Freq. Range: 50Hz - 20kHz
- Amplifier Power: 700W + 100W
- Sensitivity: 98dB
- Maximum SPL: 126dB Continuous
- LF Driver: 1 x 12" / 3" Vcoil
- HF Driver: 2 x 1" exit / 1.7" Vcoil
- Impedance: 4 ohms
- Dispersion: 110°
- Connectors: 2 x XLR input/output
2 X PowerCon Blue/White
- Net Weight: 20 kg/pc

EZ-118SA

- Built-in DSP control
- Freq. Range: 40Hz - 300Hz
- Amplifier Power: 1200W
- Sensitivity: 99dB
- Maximum SPL: 127dB Continuous
- LF Driver: 1 x 18" / 4" Vcoil
- Impedance: 4 ohms
- Connectors: 2 x XLR input/output
2 X PowerCon Blue/White
- Net Weight: 42 kg/pc



KARA-288A (ACTIVE)

- Freq. Resp.: 60Hz - 20KHz
- Sensitivity: 99dB
- Amplifier Class D: 1200W
- LF Driver: 2 x 8" / 2" Vcoil
- HF Driver: 1 x 1.77" Vcoil
- Impedance: 8 ohms
- Dispersion: 110 degrees
- Connectors: 2 x RJ45 Input / Output




LX-212A (ACTIVE)

- Freq. Resp.: 60Hz - 22KHz
- Sensitivity: 103dB
- Amplifier Class D: 1500W
- LF Driver: 2 x 12" / 2.5" Vcoil
- HF Driver: 2 x 1.77" Vcoil
- Impedance: 8 ohms
- Dispersion: 110 X 15 degrees
- Connectors:
2 x RJ45 Input / Output
2 x PowerCon Blue / White



DSP77

- 8 Signal Input (XLR) / 8 Signal Output (LAN Port) / 8 Separate Parameters
- 48 bit dual-core high-speed DSP, independent high-performance
- PC application software, USB interface protocol;
- Limit power amps power output ;
- Voltage: AC 100 ~ 240V

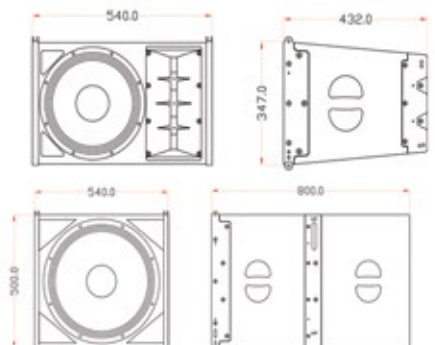



PROFESSIONAL LINE ARRAY AND STAGE SPEAKER SYSTEM



VT-18S

- 18" Subwoofer (long throw)
- Low 5" Vcoil
- 1200 Watts
- 8 ohms
- 105dB SPL
- Speakon NL4 x 2
- 723 x 546 x 736mm



LX-18S

- 18" Sub bass
- 1000 Watts
- 4" Voice Coil
- Freq. Response: 32Hz - 400kHz
- Sensitivity: 100dB
- Maximum SPL: 133dB
- Impedance: 4 ohms
- Connectors: Speakon NL4



VT-24SA

- Active Sub Woofer 24"
- Solid Deep Bass
- Class D Amplifier
- Low 5" Vcoil
- Freq. Resp.: 22Hz - 90Hz
- 2400 Watts
- Available in XLR & RJ45 input
(If using network cable,
can match with DSP88 processors)



LX-10S

- 10" 2 Way Bass Reflex
- 500 Watts
- Freq. Range: 80Hz - 20KHz
- Sensitivity: 104dB
- Maximum SPL: 136dB
- Low 2" Voice coil, High 2x1" Voice coil
- Impedance: 12.8 ohms
- Connectors: Speakon NL4



VT-28S

- Dual 18" Subwoofer
- Low 5" Vcoil
- 2400 Watts
- 4 ohms
- SPL 110dB
- Speakon NL4 x 2
- Freq. Resp.: 28Hz-450Hz



LXD-7000

- Power 4 X 1800 Watts @ 2.5 Ohms
- Total Harmonic Distortion <0.005%
- Signal to noise ratio >112dB
- Damping Factor >1000
- Slew rate >50v / us
- Build in preset DSP parameters
- Direct Energy Amplifying
- Constant Zero Distortion Power Control
- Dual Reactor Phase Shift Control
- Overheat and Clip Soft Protection





PROFESSIONAL LINE ARRAY & STAGE SPEAKER SYSTEM

Hang Position



VRX-915SA (Single 15")

- Freq. Range: 40Hz - 25kHz
- Amplifier Power: 800W x 2 RMS
- Sensitivity: 126dB
- Maximum SPL: 126dB Continuous
- Driver: 1 x 15" Bass Driver
- Impedance: 8 ohms
- Connectors:
 - 2 x XLR input/output
 - 2 X PowerCon Blue/White
- Net Weight: 33.8 kg/pc



VRX-918SA (Single 18")

- 18" Sub Bass
- 900 Watts Amplifier
- Low 4" Vcoil
- 8 ohms
- 98dB SPL
- XLR input/output
- Powercon Blue/White
- Lowpass filter 80Hz-250Hz

VRX-928 (Single 8")

- Freq. Range: 80Hz - 20KHz
- Amplifier Power: 300W RMS
- Sensitivity: 96dB
- Maximum SPL: 117dB Continuous
- LF Driver: 1 x 8" / 2" Vcoil
- Impedance: 16 ohms
- Connectors:
 - 2 x XLR input/output
 - 2 X PowerCon Blue/White
- Net Weight: 9.38 kg/pc

VRX-932A (Single 12")

- 12" 2 Way Bass Reflex
- 700 Watts Amplifier
- Low 3" Vcoil
- Hi 3 X 1.7" Vcoil
- Exit Throat 1"
- Waveguide 100 deg.
- 8 ohms
- 98dB SPL
- XLR Input/Output
- High Pass Filter 30-150Hz
- Powerkon Blue/White

K1

- Driver: 8 x 3" MH (Neo) / 1" Vcoil
- Freq. Resp.: 150Hz-18KHz
- 300 Watts
- 8 ohms
- Sensitivity: 98 dB
- Max SPL 120 dB
- Dispersion: 70 x 30 deg



K2.1

Satellite

- 2 Way Design
- 4 x 4" Woofer
- 1 x 1" Tweeter
- 96dB SPL
- 150Hz - 20KHz
- 8 ohms
- 2 x 100W
- (Includes 2 Speaker Stand)

Sub Bass (Active)

- 1 x 12" Subwoofer
- 96dB
- 45Hz - 150Kz
- 8 ohms
- 300W
- USB / SD / Bluetooth

KS-12A

- Driver: 1 x 12" LF / 3" Vcoil
- Amp Power: 350W x 2 @ 8 ohms
- Maximum SPL: 122 dB continuous
- XLR Input/output
- Speaker out to passive sub
- Powerkon Blue/White



Stand Position

