

CM-WT33LR

Photoelectric Type Smoke Detector

ISO9001

Approvals: CE




■ ADVANTAGES

- * Dual LEDs for 360-degree visibility. Bi-color LEDs, Green : Stand-by status ; Red : Alarm status.
- * With the principle, this detector will be activated more quickly, accurately, and reliably. And no false alarm from chemicals, exhaust gas, wind and exterior light.
- * Detector has passed EMC test, which greatly eliminates false alarms caused by interference from nearby sources.
- * Pretty and jointless appearance.

■ DIMENSIONS

Unit: mm

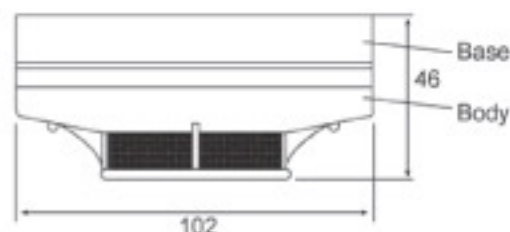

■ SPECIFICATION

MODEL NO.	CM-WT33LR	CM-WT33LT	SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire & 3-wire	4-wire	AMBIENT TEMP.	-10°C - +55°C
VOLTAGE RANGE	12V~30V DC Fire Alarm System	12V Security	AMBIENT HUMIDITY	0 - 95%
CONTACT RATING	N/A	1A @30V DC	MATERIAL	Burning-Proof plastics
ALARM CURRENT	24V DC 30mA		DIMENSIONS	102 (Dia.) x 46 (H)mm
STANDBY CURRENT	24V DC/25µA Below		COLOR	White
POLARIZATION	Polarized	Non-Polarized	REMARK	Apply to base model no. CM-BSN3 & CM-BSN3T
WEIGHT	131g	137g		

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4M	4M-8M
AREA COVER	150M ²	75M ²

CM CHUNG MEI FIRE FIGHTING SUPPLIER CO.,LTD

CATALOG NO. CM-WT33LR_20190209