

iClock880

Fingerprint Time Attendance & Access Control Terminal



Introduction:

iClock880 is a 3.5-inch TFT screen Time Attendance & Access Control Terminal. Adopting the new user-friendly firmware and latest core-board, it improves performance, accelerates identification speed and more extendable for various customization requirement. What's more, the user-friendly interface gives you a new experience. It has standard functions like TCP/IP, RS-232/485, USB-host, camera, 8 functions keys, T9 input, and backup battery. It also has access control interfaces for wiegand -in, wiegand -out, door lock, alarm and door bell.

Features:

Remarkable User Experience

- Intuitive and stunning UI designed with the most popular and internationalized element.
- User validity setting.

- Great user interactivity.
- Interface operation adopts modularized hierarchical design. Simpler, better and more logical.

Enhanced Features And Performance

- Multi-languages.
- Data backup and retrieve.
- Chip encryption for firmware protection.
- Advanced User ID consisted of letters and numbers.

Excellent Expandability

- Easy to extend functions and customize customers' requirements.

Access control interfaces


- For wiegand in and out, door lock connection, alarm and bell.

Specifications


Fingerprint Capacity	8,000 (Optional: 50,000)
ID Card Capacity	10,000 (Optional: 50,000)
Record Capacity	200,000(Optional: 800,000)
Display	3.5-inch TFT Screen

Communication	RS232/485, TCP/IP, USB-host
Standard Functions	Work code, SMS, DST, Webserver, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID, Multiple Verify Mode, T9 Input, Camera, Anti-passback, Built-in Battery
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, and Door Bell
Wiegand Signal	Input & Output
Optional Functions	ID/Mifare/HID, 3G, WIFI, External Printer, ADMS
Software	ZKTime. Net, ZKTime 5.0
Power Supply	DC12V 3A
Verification Speed	≤0.5 Sec.
Operating Temp	0°C- 45°C
Operating Humidity	20%-80%
Dimension	213*177.9*51.4mm (Length*Width*Thickness)
Net Weight	2.05kg


Dimensions (mm)

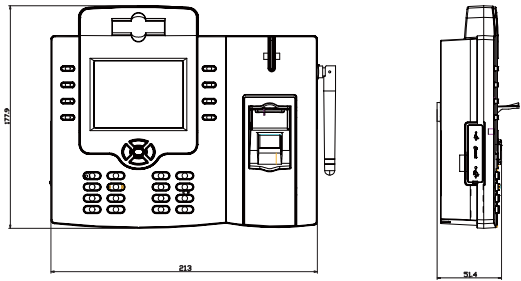

Configuration

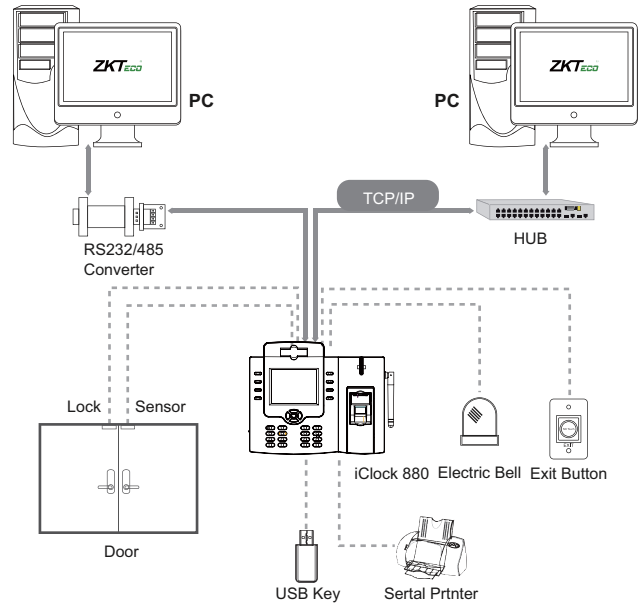

Interface

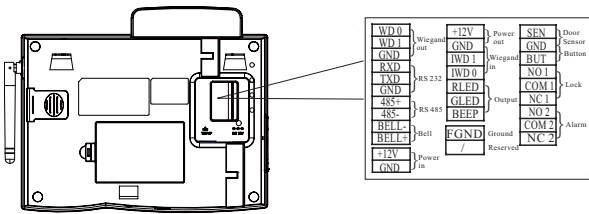

Package List

